


SPECIFICATION

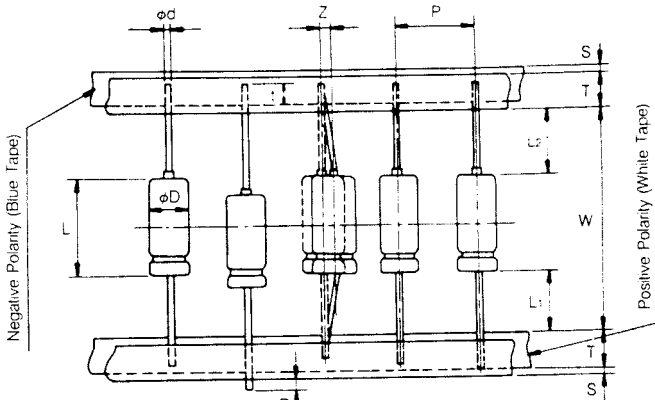

● PACKING

φ D	Packing Q'ty/Reel(pcs)
6.3	1000
8	800
10	500

● DIMENSIONS

Description	Symbol	Tolerarnace	Can size(φ DxL)					
			6.3x12	6.3x16	8x16	8x20	10x17	10x21
Body Dia.	φ D	max.	6.5	6.5	8.5	8.5	10.5	10.5
Body Length	L	max.	13	17	17	21	18	22
Lead Wire Dia.	φ d	±0.05	0.6	0.6	0.6	0.6	0.6	0.6
Tape Width	T	±1.0	6	6	6	6	6	6
Tape to tape Distance	W	±1.5	63	63	63	73	73	73
Length Protrusion	R	max.	0.5	0.5	0.5	0.5	0.5	0.5
Length of Lead-tape interface	+	min.	3.2	3.2	3.2	3.2	3.2	3.2
Adhesive Tape Margin	S	max.	0.8	0.8	0.8	0.8	0.8	0.8
Centering Declination Between Tapes	L ₁ -L ₂	max.	1.0	1.0	1.0	1.0	1.0	1.0
Body Inclination	Z	max.	1.2	1.2	1.2	1.2	1.2	1.2
Body Pitch	P	±0.05	10	10	10	10	15	15

LEAD FORMING & CUT

Configurations	Code	φ D	SHAPE
Forming & Cut (F-Type)	F	≦ φ 8	
Straight Cut (C-Type)	C	φ 4 ~ φ 18	