

Data Sheet

Customer: _____

Product: SMD Aluminum Electrolytic Capacitors – EZV Series _____

Size : 4x5.5mm ~ 18x21.5mm _____

Issued Date: 15-May.-2016 _____

Edition: Ver. 1 _____

Record of change

Date	Ver.	Description	Page
15-May-2016	1		

HITANO ENTERPRISE CORP.

7F-7, No. 3, Wu Chuan 1st Road, New Taipei Industrial Park,

New Taipei City, TAIWAN, R.O.C.

Tel: +886 2 2299 1331 (Rep.)

Fax: +886 2 2298 2466, 2298 2969

Prepared by	Checked by	Approved by	Accepted by (customer)
15-May-2016	15-May-2016	15-May-2016	
<i>Andy Hsu</i>	<i>Hwa Wu</i>	<i>Hwa Wu</i>	

- SMD Low Impedance Type. Reflow Soldering is available.
- 4~18φ, 105°C, 2000 ~ 5000 hours load life., Rohs compliant
- Available For High Density Mounting

Characteristics

Voltage Range	6.3 to 100 VDC								
Capacitance Range	1.0 to 6800uF								
Temperature Range	-55 to +105°C								
Capacitance Tolerance	+/-20% (at 20°C, 120Hz)								
Leakage Current	I≤0.01CV or 3uA, whichever is greater, 2 minutes after Rated Voltage applied, where C = Rated Capacitance, V = Rated DC working voltage								
Dissipation Factor (tanδ) Max (at 20°C, 120Hz)	Rated Voltage (V)	6.3	10	16	25	35	50	63	100
	D.F.(tanδ)	0.30	0.26	0.22	0.16	0.13	0.10	0.08	0.07
Stability at Low Temperature (at 20°C, 120Hz)	Rated Voltage (V)	6.3	10	16	25	35	50	63	100
	Z-25°C/Z 20°C	4	3	2	2	2	2	2	2
	Z-55°C/Z 20°C	8	5	4	3	3	3	3	3
Load Life After the rated voltage has been applied for 2000~5000 hours at 105°C	2000hrs for D ≤ 6.3mm, 5000hrs for D ≥ 8mm	Capacitance change			Within ±30% of initial value				
		D.F. (tanδ)			300% or less of initial specified value				
		Leakage current			Less than initial specified value				
Shelf Life	After storage for 1000 hours at 105°C, with no voltage applied and being stabilized at +20°C, Capacitor shall meet the limit specified in load life.								

Diagram of dimensions

SIZE	Dφ	L	A	B	C	W	P±0.2
A	4	5.5±0.2	4.3	4.3	5.1	0.5~0.8	1.0
B	5	5.5±0.2	5.3	5.3	5.9	0.5~0.8	1.5
C	6.3	5.5±0.2	6.6	6.6	7.2	0.5~0.8	2.0
C8	6.3	7.7±0.3	6.6	6.6	7.2	0.5~0.8	2.0
D	8	6.5±0.3	8.4	8.4	9.0	0.5~0.8	2.3
E	8	10.5±0.3	8.4	8.4	9.0	0.7~1.1	3.1
F	10	10.5±0.3	10.4	10.4	11.0	0.7~1.3	4.5
G	12.5	14±0.3	13.5	13.5	15.0	1.1~1.4	4.5
H	12.5	16±0.3	13.0	13.0	15.0	1.1~1.4	4.5
I	16	16.5±0.5	17.0	17.0	18.0	1.1~1.4	6.4
J	16	21.5±0.5	17.0	17.0	18.0	1.1~1.4	6.4
K	18	16.5±0.5	19.0	19.0	20.0	1.1~1.4	6.4
L	18	21.5±0.5	19.0	19.0	20.0	1.1~1.4	6.4

Size A~F refer to Fig. 1

Size G~L refer to Fig. 2

Fig. 1


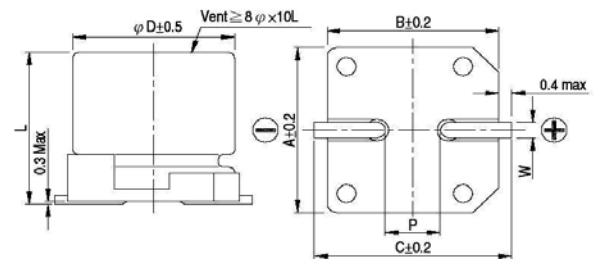


Fig. 2

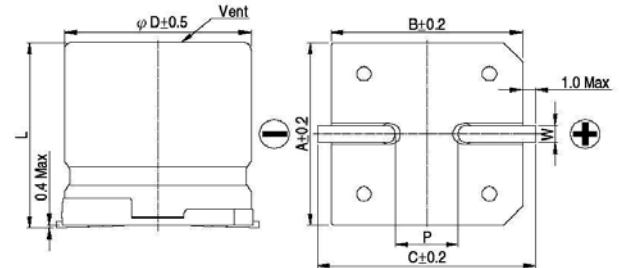

Multiplier for Ripple Current vs Frequency

Frequency(Hz)	60(50)	120	1K	≥10K
Multiplier	0.60	0.70	0.85	1.00

Part Numbering System

EZV □ □ □ □ □ □ R □
Series Capacitance Tolerance Rated Voltage Package Case Size

