

K41 TYPE -40°C +85°C 12000H

RoHS Compliant
 Directive 2002/95/EC

- Surge-proof capacitor in aluminium can with insulation sleeve.
- To be mounted with ring clips or with threaded stud.
- Design optimized for long term vibrations stress, traction market.

APPLICATIONS

Designed for professional application under high mechanical stress.

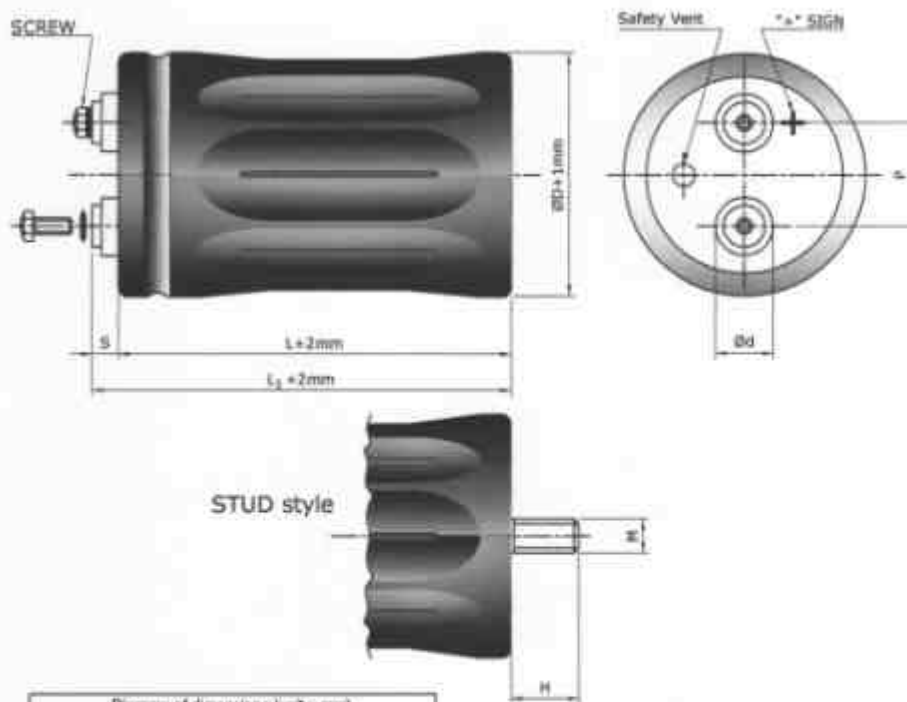


Diagram of dimensions (unit = mm)					
ØD	d	P	M	H	SCREW
35	11	12.7	M8	12	5MAx8.5
51	16.5	22.2	M12	16	5MAx9.5
63	16.5	29.5	M12	16	5MAx9.5
76	16.5	31.8	M12	16	5MAx8.5 6MAx10
90	16.5	31.8	M12	16	6MAx10
L ₁	L ₁ = L + 2.5 mm L ₁ tol: -0/+2mm		L ₁ = L + 4.5 mm L ₁ tol: -1/+3mm		
S	MS = S-0+1mm from top of deck		MS = 7.1+1mm from top of deck		

SPECIFICATIONS

Octagonal can shape

For the other specifications please consider the catalogue of series K01 TYPE

PART NUMBER SYSTEM

Please consider the part number defined for K01 TYPE series with second digit = "4" instead of "0".